

1550 FRONTIER



STABICRAFT

ADVENTURE WITH CONFIDENCE


1550 FRONTIER

SAFETY FEATURES:

Reserve Buoyancy
NZ CPC boat safety standards
US Coastguard boat safety standards
LED navigation lights
Australian Builders Plate boat safety standards

SPECIFICATIONS:

Length Feet (Metres)	15.5ft (4.72m)
Max Adults	5
Recommended HP	50hp
Maximum HP	75hp
Max Engine Weight	166kg (366lbs) Yamaha F75
Leg Length	20"
Fuel Tank	85L (22gal)
External Beam	2.02m (79.5")
Internal Beam	1.46m (57.5")
Deadrise	15°
Tube Thickness	2.5mm (3/32")
Hull Thickness	4mm (5/32")
Sealed Buoyancy Capacity (Approx)	984L (260gal)
Dry Hull Weight (Approx)	415kg (915lbs)
Tow Weight (Approx)	740kg (1631lbs)
Length on Trailer	6m (19'9")

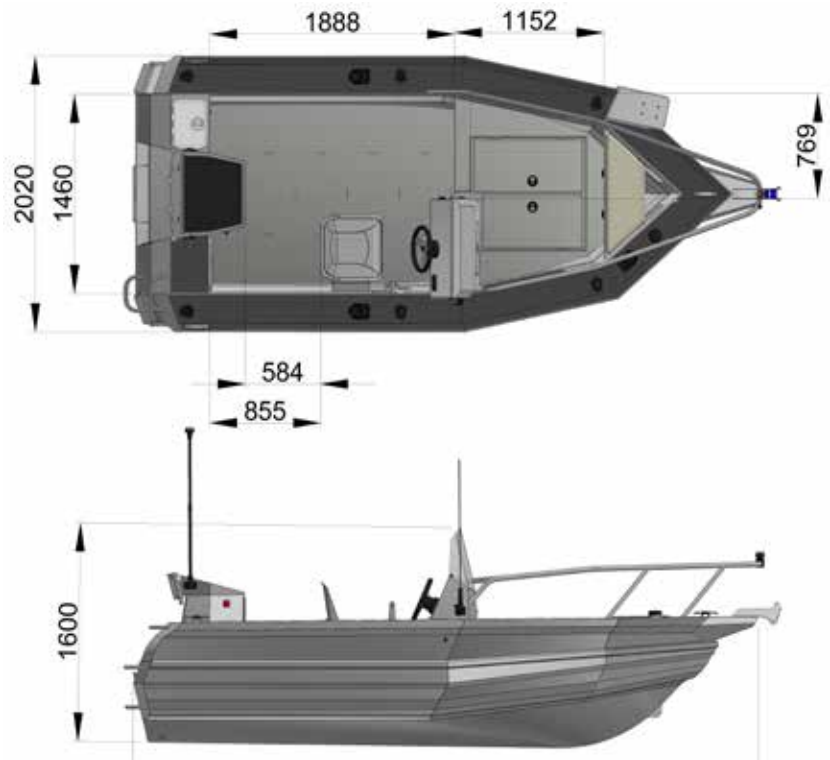

STANDARD FEATURES:

Bow storage shelves
SARCA aluminium fairlead
Battery and oil tank storage
Battery compartment hatch
Bilge pump and well
Bow seating with cushion
Graphics package
Heavy duty filleting board
Drink & Rodholders
Live bait tank
Rodholders in aft coamings
Skipper seats upholstered
Stabi cleats
Stabicraft Multiholders (drink and tackle holders)
Steering - Planetary
Superfish transom box
Underfloor storage

STANDARD FEATURES:

Wingstyle coamings
4-way dash switch panel
Alloy towing eye with S/S wear sleeves
Anchor rope and chain storage locker
Arrow Pontoons
Battery isolation switch
Bow casting platform
Shimano tackle boxes
Soft touch Gussi steering wheel
So-Pac hatch batteries
Battery storage x 3
Boarding ladder welded
Coaming Octigrip
Minn Kota bracket
Railblaza ports
Canitilever seat base with storage
Folding console screen

OPTIONAL FEATURES:

Anchor, chain and warp
Adhesive fendering
External gunwale handrails
Injected foam in pontoons
Paint - Belting up
Paint - External Pontoon
Paint - Metallic upgrade
Steering - Hydraulic
Tube floor matting
Washdown pump kit
Fishfinder
VHF radio & aerial
Maxwell Drum Winch
Ultralon foam flooring
Transducer bracket adjustable
Tuna tube x 1



E: enquiries@stabcraft.com

P: 0064 3 211 1828

A: 345 Bluff Highway, Invercargill, New Zealand

www.stabcraft.com

